

Hydrodynamic linear stability of the 2D bluff-body wake through modal analysis and initial-value problem formulation

Stefania Scarsoglio¹
Daniela Tordella² William O. Criminale³

¹Department of Hydraulics, Politecnico di Torino

²Department of Aeronautics and Space Engineering, Politecnico di Torino

³Department of Applied Mathematics, University of Washington

DICAT, Università di Genova
May 6th, 2010



Introduction
Physical Problem
Streamwise Entrainment Evolution
Normal Mode Analysis
Transient and Long-Term Behavior of Small 3D Perturbations
Multiscale analysis for the stability of long 3D waves
Conclusions

Outline

1 Introduction



Outline

- 1 Introduction
- 2 Physical Problem



Outline

- 1 Introduction
- 2 Physical Problem
- 3 Streamwise Entrainment Evolution



Outline

- 1 Introduction
- 2 Physical Problem
- 3 Streamwise Entrainment Evolution
- 4 Normal Mode Analysis



Outline

- 1 Introduction
- 2 Physical Problem
- 3 Streamwise Entrainment Evolution
- 4 Normal Mode Analysis
- 5 Transient and Long-Term Behavior of Small 3D Perturbations



Outline

- 1 Introduction
- 2 Physical Problem
- 3 Streamwise Entrainment Evolution
- 4 Normal Mode Analysis
- 5 Transient and Long-Term Behavior of Small 3D Perturbations
- 6 Multiscale analysis for the stability of long 3D waves



Outline

- 1 Introduction
- 2 Physical Problem
- 3 Streamwise Entrainment Evolution
- 4 Normal Mode Analysis
- 5 Transient and Long-Term Behavior of Small 3D Perturbations
- 6 Multiscale analysis for the stability of long 3D waves
- 7 Conclusions

Linear stability analysis of the 2D bluff-body wake

- **Stability analysis**

- Hydrodynamics stability is important in different fields (aerodynamics, oceanography, environmental sciences, etc);



Linear stability analysis of the 2D bluff-body wake

● Stability analysis

- Hydrodynamics stability is important in different fields (aerodynamics, oceanography, environmental sciences, etc);
- To understand the reasons for the breakdown of laminar flow;



Linear stability analysis of the 2D bluff-body wake

● Stability analysis

- Hydrodynamics stability is important in different fields (aerodynamics, oceanography, environmental sciences, etc);
- To understand the reasons for the breakdown of laminar flow;
- To predict the transition to turbulence.



Linear stability analysis of the 2D bluff-body wake

● Stability analysis

- Hydrodynamics stability is important in different fields (aerodynamics, oceanography, environmental sciences, etc);
- To understand the reasons for the breakdown of laminar flow;
- To predict the transition to turbulence.

● Modal theory

- Flow asymptotically stable or unstable;



Linear stability analysis of the 2D bluff-body wake

● Stability analysis

- Hydrodynamics stability is important in different fields (aerodynamics, oceanography, environmental sciences, etc);
- To understand the reasons for the breakdown of laminar flow;
- To predict the transition to turbulence.

● Modal theory

- Flow asymptotically stable or unstable;
- Discrete spectrum (not complete for unbounded flows);



Linear stability analysis of the 2D bluff-body wake

● Stability analysis

- Hydrodynamics stability is important in different fields (aerodynamics, oceanography, environmental sciences, etc);
- To understand the reasons for the breakdown of laminar flow;
- To predict the transition to turbulence.

● Modal theory

- Flow asymptotically stable or unstable;
- Discrete spectrum (not complete for unbounded flows);
- Convective and absolute instability.



Linear stability analysis of the 2D bluff-body wake

● Stability analysis

- Hydrodynamics stability is important in different fields (aerodynamics, oceanography, environmental sciences, etc);
- To understand the reasons for the breakdown of laminar flow;
- To predict the transition to turbulence.

● Modal theory

- Flow asymptotically stable or unstable;
- Discrete spectrum (not complete for unbounded flows);
- Convective and absolute instability.

● Initial-value problem

- Temporal evolution of arbitrary disturbances;



Linear stability analysis of the 2D bluff-body wake

● Stability analysis

- Hydrodynamics stability is important in different fields (aerodynamics, oceanography, environmental sciences, etc);
- To understand the reasons for the breakdown of laminar flow;
- To predict the transition to turbulence.

● Modal theory

- Flow asymptotically stable or unstable;
- Discrete spectrum (not complete for unbounded flows);
- Convective and absolute instability.

● Initial-value problem

- Temporal evolution of arbitrary disturbances;
- Importance of the transient growth (e. g. *by-pass transition*);



Linear stability analysis of the 2D bluff-body wake

● Stability analysis

- Hydrodynamics stability is important in different fields (aerodynamics, oceanography, environmental sciences, etc);
- To understand the reasons for the breakdown of laminar flow;
- To predict the transition to turbulence.

● Modal theory

- Flow asymptotically stable or unstable;
- Discrete spectrum (not complete for unbounded flows);
- Convective and absolute instability.

● Initial-value problem

- Temporal evolution of arbitrary disturbances;
- Importance of the transient growth (e. g. *by-pass transition*);
- Aim to understand the cause of any possible instability in terms of the underlying physics.

The two-dimensional bluff-body wake

- Flow behind a circular cylinder:



The two-dimensional bluff-body wake

- Flow behind a circular cylinder:
⇒ **Steady, incompressible and viscous;**





The two-dimensional bluff-body wake

- Flow behind a circular cylinder:
⇒ **Steady, incompressible and viscous**;
- Approximation of 2D asymptotic Navier-Stokes expansions (Belan & Tordella, *Phys. Fluids*, 2003), $20 \leq Re \leq 100$.




The two-dimensional bluff-body wake

- Flow behind a circular cylinder:
⇒ **Steady, incompressible and viscous**;
- Approximation of 2D asymptotic Navier-Stokes expansions (Belan & Tordella, *Phys. Fluids*, 2003), $20 \leq Re \leq 100$.

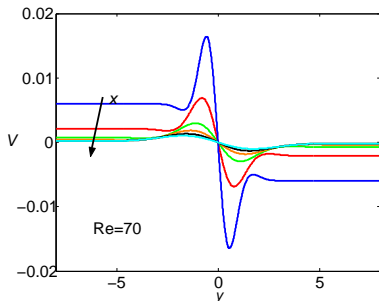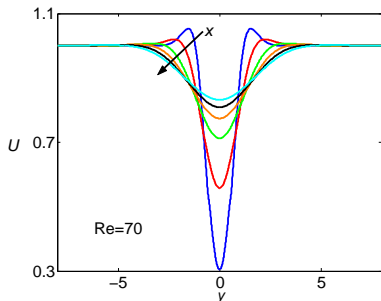

The two-dimensional bluff-body wake

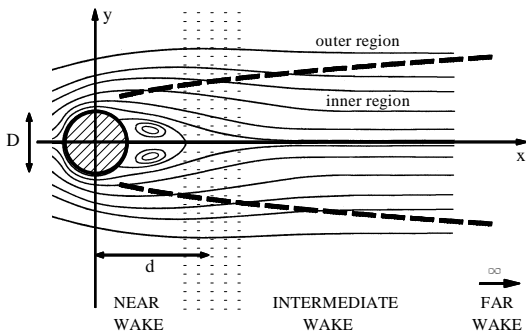

Velocity Flow Rate Defect and Entrainment

- Defect of the volumetric flow rate D :

$$D(x) = \int_{-\infty}^{+\infty} (1 - U(x, y)) dy$$



Velocity Flow Rate Defect and Entrainment

- Defect of the volumetric flow rate D :

$$D(x) = \int_{-\infty}^{+\infty} (1 - U(x, y)) dy$$





- Entrainment E takes into account the variation of the defect of the volumetric flow rate in the streamwise direction:

$$E(x) = \left| \frac{dD(x)}{dx} \right|$$

Tordella & Scarsoglio, *Phys. Letters A*, 2009.



Results



Normal Mode Theory

- The linearized perturbative equation in terms of stream function $\psi(x, y, t)$ is

$$\partial_t \nabla^2 \psi + (\partial_x \nabla^2 \Psi) \psi_y + \Psi_y \partial_x \nabla^2 \psi - (\partial_y \nabla^2 \Psi) \psi_x - \Psi_x \partial_y \nabla^2 \psi = \frac{1}{Re} \nabla^4 \psi$$



Normal Mode Theory

- The linearized perturbative equation in terms of stream function $\psi(x, y, t)$ is

$$\partial_t \nabla^2 \psi + (\partial_x \nabla^2 \Psi) \psi_y + \Psi_y \partial_x \nabla^2 \psi - (\partial_y \nabla^2 \Psi) \psi_x - \Psi_x \partial_y \nabla^2 \psi = \frac{1}{Re} \nabla^4 \psi$$

- *Normal mode hypothesis* $\Rightarrow \psi(x, y, t) = \varphi(x, y, t) e^{i(h_0 x - \sigma_0 t)}$



Normal Mode Theory

- The linearized perturbative equation in terms of stream function $\psi(x, y, t)$ is

$$\partial_t \nabla^2 \psi + (\partial_x \nabla^2 \Psi) \psi_y + \Psi_y \partial_x \nabla^2 \psi - (\partial_y \nabla^2 \Psi) \psi_x - \Psi_x \partial_y \nabla^2 \psi = \frac{1}{Re} \nabla^4 \psi$$

- *Normal mode hypothesis* $\Rightarrow \psi(x, y, t) = \varphi(x, y, t) e^{i(h_0 x - \sigma_0 t)}$
 - $\varphi(x, y, t)$ complex eigenfunction;



Normal Mode Theory

- The linearized perturbative equation in terms of stream function $\psi(x, y, t)$ is

$$\partial_t \nabla^2 \psi + (\partial_x \nabla^2 \Psi) \psi_y + \Psi_y \partial_x \nabla^2 \psi - (\partial_y \nabla^2 \Psi) \psi_x - \Psi_x \partial_y \nabla^2 \psi = \frac{1}{Re} \nabla^4 \psi$$

- *Normal mode hypothesis* $\Rightarrow \psi(x, y, t) = \varphi(x, y, t) e^{i(h_0 x - \sigma_0 t)}$
 - $\varphi(x, y, t)$ complex eigenfunction;
 - $h_0 = k_0 + i s_0$ complex wavenumber (k_0 wavenumber, s_0 spatial growth rate);



Normal Mode Theory

- The linearized perturbative equation in terms of stream function $\psi(x, y, t)$ is

$$\partial_t \nabla^2 \psi + (\partial_x \nabla^2 \Psi) \psi_y + \Psi_y \partial_x \nabla^2 \psi - (\partial_y \nabla^2 \Psi) \psi_x - \Psi_x \partial_y \nabla^2 \psi = \frac{1}{Re} \nabla^4 \psi$$

- *Normal mode hypothesis* $\Rightarrow \psi(x, y, t) = \varphi(x, y, t) e^{i(h_0 x - \sigma_0 t)}$
 - $\varphi(x, y, t)$ complex eigenfunction;
 - $h_0 = k_0 + i s_0$ complex wavenumber (k_0 wavenumber, s_0 spatial growth rate);
 - $\sigma_0 = \omega_0 + i r_0$ complex frequency (ω_0 frequency, r_0 temporal growth rate);



Normal Mode Theory

- The linearized perturbative equation in terms of stream function $\psi(x, y, t)$ is

$$\partial_t \nabla^2 \psi + (\partial_x \nabla^2 \Psi) \psi_y + \Psi_y \partial_x \nabla^2 \psi - (\partial_y \nabla^2 \Psi) \psi_x - \Psi_x \partial_y \nabla^2 \psi = \frac{1}{Re} \nabla^4 \psi$$

- *Normal mode hypothesis* $\Rightarrow \psi(x, y, t) = \varphi(x, y, t) e^{i(h_0 x - \sigma_0 t)}$
 - $\varphi(x, y, t)$ complex eigenfunction;
 - $h_0 = k_0 + i s_0$ complex wavenumber (k_0 wavenumber, s_0 spatial growth rate);
 - $\sigma_0 = \omega_0 + i r_0$ complex frequency (ω_0 frequency, r_0 temporal growth rate);
- **Convective instability:** $r_0 < 0$ for all modes, $s_0 < 0$ for at least one mode.



Normal Mode Theory

- The linearized perturbative equation in terms of stream function $\psi(x, y, t)$ is

$$\partial_t \nabla^2 \psi + (\partial_x \nabla^2 \Psi) \psi_y + \Psi_y \partial_x \nabla^2 \psi - (\partial_y \nabla^2 \Psi) \psi_x - \Psi_x \partial_y \nabla^2 \psi = \frac{1}{Re} \nabla^4 \psi$$

- *Normal mode hypothesis* $\Rightarrow \psi(x, y, t) = \varphi(x, y, t) e^{i(h_0 x - \sigma_0 t)}$
 - $\varphi(x, y, t)$ complex eigenfunction;
 - $h_0 = k_0 + i s_0$ complex wavenumber (k_0 wavenumber, s_0 spatial growth rate);
 - $\sigma_0 = \omega_0 + i r_0$ complex frequency (ω_0 frequency, r_0 temporal growth rate);
- **Convective instability:** $r_0 < 0$ for all modes, $s_0 < 0$ for at least one mode.
- **Absolute instability:** $r_0 > 0$, $\partial \sigma_0 / \partial h_0 = 0$ for at least one mode.

Stability analysis through multiscale approach

- Slow variables: $x_1 = \epsilon X$, $t_1 = \epsilon t$, $\epsilon = 1/Re$.



Stability analysis through multiscale approach

- Slow variables: $x_1 = \epsilon X$, $t_1 = \epsilon t$, $\epsilon = 1/Re$.
- *Hypothesis*: $\psi(x, y, t)$ and $\Psi(x, y, t)$ are expansions in terms of ϵ :
(ODE dependent on φ_0) + ϵ (ODE dependent on φ_0, φ_1) + $O(\epsilon^2)$



Stability analysis through multiscale approach

- Slow variables: $x_1 = \epsilon X$, $t_1 = \epsilon t$, $\epsilon = 1/Re$.
- **Hypothesis:** $\psi(x, y, t)$ and $\Psi(x, y, t)$ are expansions in terms of ϵ :
(ODE dependent on φ_0) + ϵ (ODE dependent on φ_0, φ_1) + $O(\epsilon^2)$
- **Order zero:** homogeneous Orr-Sommerfeld equation

$$\mathcal{A}\varphi_0 = \sigma_0 \mathcal{B}\varphi_0 \quad \mathcal{A} = (\partial_y^2 - h_0^2)^2 - ih_0 Re[u_0(\partial_y^2 - h_0^2) - \partial_y^2 u_0]$$

$$\varphi_0 \rightarrow 0, |y| \rightarrow \infty \quad \mathcal{B} = -iRe(\partial_y^2 - h_0^2)$$

$$\partial_y \varphi_0 \rightarrow 0, |y| \rightarrow \infty$$

\Rightarrow eigenfunctions φ_0 and a discrete set of eigenvalues σ_{0n} .




Perturbative hypothesis: saddle point sequence

- For fixed values of x and Re , the saddle points (h_{0s}, σ_{0s}) of the dispersion relation $\sigma_0 = \sigma_0(h_0, x, Re)$ satisfy $\partial\sigma_0/\partial h_0 = 0$;



Perturbative hypothesis: saddle point sequence



- For fixed values of x and Re , the saddle points (h_{0s}, σ_{0s}) of the dispersion relation $\sigma_0 = \sigma_0(h_0, x, Re)$ satisfy $\partial\sigma_0/\partial h_0 = 0$;

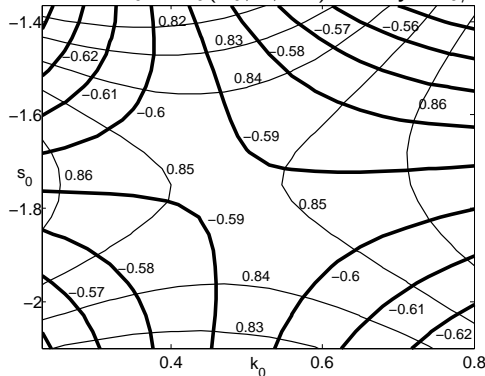

$Re = 35, x = 4$. Level curves, $\omega_0 = \text{const}$ (thin curves), $r_0 = \text{const}$ (thick curves).




Perturbative hypothesis: saddle point sequence

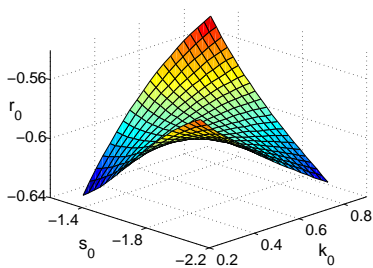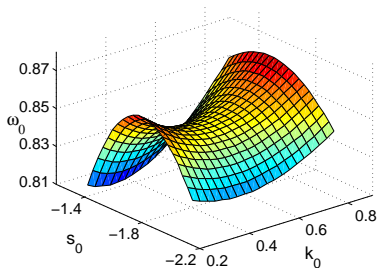

$$Re = 35, x = 4. \omega_0(k_0, s_0), r_0(k_0, s_0).$$




Instability Characteristics

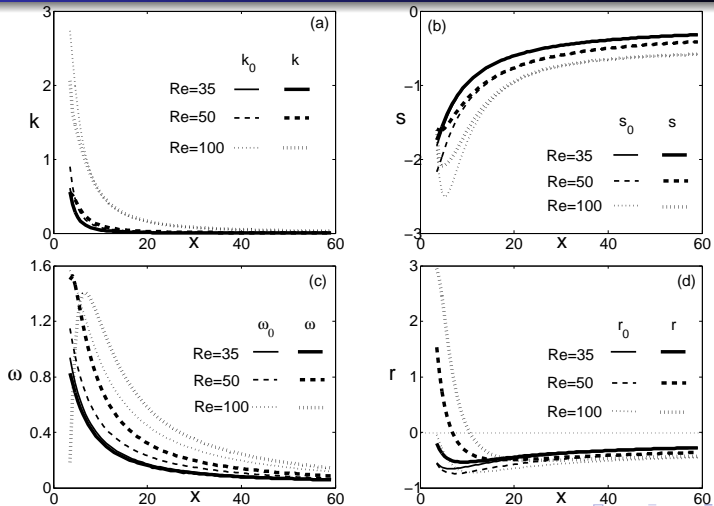

Global Pulsation

- Comparison between present solution (accuracy $\Delta\omega = 0.05$), Zebib's numerical study (*J. Eng. Math.*, 1987), Pier's direct numerical simulations (*J. Fluid Mech.*, 2002), Williamson's experimental results (*Phys. Fluids*, 1988).

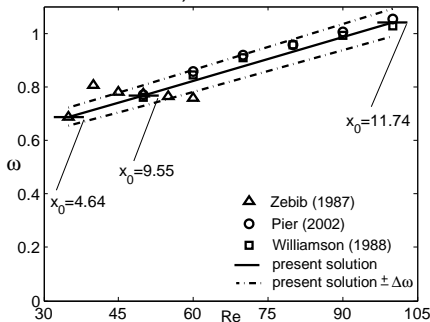

Tordella, Scarsoglio & Belan, *Phys. Fluids*, 2006.



Formulation

- Linear three-dimensional perturbative equations in terms of velocity and vorticity (Criminale & Drazin, *Stud. Applied Math.*, 1990);



Formulation

- Linear three-dimensional perturbative equations in terms of velocity and vorticity (Criminale & Drazin, *Stud. Applied Math.*, 1990);
- Base flow parametric in x and $Re \Rightarrow U(y; x_0, Re)$;




Formulation

- Linear three-dimensional perturbative equations in terms of velocity and vorticity (Criminale & Drazin, *Stud. Applied Math.*, 1990);
- Base flow parametric in x and $Re \Rightarrow U(y; x_0, Re)$;
- Laplace-Fourier transform in x and z directions, α complex, γ real;



Formulation

- Linear three-dimensional perturbative equations in terms of velocity and vorticity (Criminale & Drazin, *Stud. Applied Math.*, 1990);
- Base flow parametric in x and $Re \Rightarrow U(y; x_0, Re)$;
- Laplace-Fourier transform in x and z directions, α complex, γ real;

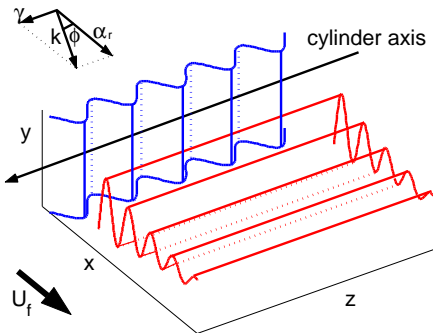

α_r = longitudinal wavenumber
 γ = transversal wavenumber
 ϕ = angle of obliquity
 k = polar wavenumber
 α_i = spatial damping rate



Perturbative equations

- Perturbative linearized system:

$$\begin{aligned}\frac{\partial^2 \hat{v}}{\partial y^2} &= (k^2 - \alpha_i^2 + 2i\alpha_r\alpha_i)\hat{v} = \hat{\Gamma} \\ \frac{\partial \hat{\Gamma}}{\partial t} &= (i\alpha_r - \alpha_i)\left(\frac{d^2 U}{dy^2}\hat{v} - U\hat{\Gamma}\right) + \frac{1}{Re}\left[\frac{\partial^2 \hat{\Gamma}}{\partial y^2} - (k^2 - \alpha_i^2 + 2i\alpha_r\alpha_i)\hat{\Gamma}\right] \\ \frac{\partial \hat{\omega}_y}{\partial t} &= -(i\alpha_r - \alpha_i)U\hat{\omega}_y - i\gamma\frac{dU}{dy}\hat{v} + \frac{1}{Re}\left[\frac{\partial^2 \hat{\omega}_y}{\partial y^2} - (k^2 - \alpha_i^2 + 2i\alpha_r\alpha_i)\hat{\omega}_y\right]\end{aligned}$$



Perturbative equations

- Perturbative linearized system:

$$\frac{\partial^2 \hat{v}}{\partial y^2} - (k^2 - \alpha_i^2 + 2i\alpha_r\alpha_i)\hat{v} = \hat{\Gamma}$$

$$\frac{\partial \hat{\Gamma}}{\partial t} = (i\alpha_r - \alpha_i)\left(\frac{d^2 U}{dy^2}\hat{v} - U\hat{\Gamma}\right) + \frac{1}{Re}\left[\frac{\partial^2 \hat{\Gamma}}{\partial y^2} - (k^2 - \alpha_i^2 + 2i\alpha_r\alpha_i)\hat{\Gamma}\right]$$

$$\frac{\partial \hat{\omega}_y}{\partial t} = -(i\alpha_r - \alpha_i)U\hat{\omega}_y - i\gamma\frac{dU}{dy}\hat{v} + \frac{1}{Re}\left[\frac{\partial^2 \hat{\omega}_y}{\partial y^2} - (k^2 - \alpha_i^2 + 2i\alpha_r\alpha_i)\hat{\omega}_y\right]$$

The transversal velocity and vorticity components are \hat{v} and $\hat{\omega}_y$ respectively, $\hat{\Gamma}$ is defined as $\tilde{\Gamma} = \partial_x \tilde{\omega}_z - \partial_z \tilde{\omega}_x$.



Perturbative equations

- Perturbative linearized system:

$$\frac{\partial^2 \hat{v}}{\partial y^2} - (k^2 - \alpha_i^2 + 2i\alpha_r\alpha_i)\hat{v} = \hat{\Gamma}$$

$$\frac{\partial \hat{\Gamma}}{\partial t} = (i\alpha_r - \alpha_i)\left(\frac{d^2 U}{dy^2}\hat{v} - U\hat{\Gamma}\right) + \frac{1}{Re}\left[\frac{\partial^2 \hat{\Gamma}}{\partial y^2} - (k^2 - \alpha_i^2 + 2i\alpha_r\alpha_i)\hat{\Gamma}\right]$$

$$\frac{\partial \hat{\omega}_y}{\partial t} = -(i\alpha_r - \alpha_i)U\hat{\omega}_y - i\gamma\frac{dU}{dy}\hat{v} + \frac{1}{Re}\left[\frac{\partial^2 \hat{\omega}_y}{\partial y^2} - (k^2 - \alpha_i^2 + 2i\alpha_r\alpha_i)\hat{\omega}_y\right]$$

The transversal velocity and vorticity components are \hat{v} and $\hat{\omega}_y$ respectively, $\hat{\Gamma}$ is defined as $\tilde{\Gamma} = \partial_x \tilde{\omega}_z - \partial_z \tilde{\omega}_x$.

- Initial conditions:

- $\hat{\omega}_y(0, y) = 0$;



Perturbative equations

- Perturbative linearized system:

$$\frac{\partial^2 \hat{v}}{\partial y^2} - (k^2 - \alpha_i^2 + 2i\alpha_r\alpha_i)\hat{v} = \hat{\Gamma}$$

$$\frac{\partial \hat{\Gamma}}{\partial t} = (i\alpha_r - \alpha_i)\left(\frac{d^2 U}{dy^2}\hat{v} - U\hat{\Gamma}\right) + \frac{1}{Re}\left[\frac{\partial^2 \hat{\Gamma}}{\partial y^2} - (k^2 - \alpha_i^2 + 2i\alpha_r\alpha_i)\hat{\Gamma}\right]$$

$$\frac{\partial \hat{\omega}_y}{\partial t} = -(i\alpha_r - \alpha_i)U\hat{\omega}_y - i\gamma\frac{dU}{dy}\hat{v} + \frac{1}{Re}\left[\frac{\partial^2 \hat{\omega}_y}{\partial y^2} - (k^2 - \alpha_i^2 + 2i\alpha_r\alpha_i)\hat{\omega}_y\right]$$

The transversal velocity and vorticity components are \hat{v} and $\hat{\omega}_y$ respectively, $\hat{\Gamma}$ is defined as $\tilde{\Gamma} = \partial_x \tilde{\omega}_z - \partial_z \tilde{\omega}_x$.

- Initial conditions:

- $\hat{\omega}_y(0, y) = 0$;
- $\hat{\Gamma}(0, y) = e^{-y^2} \sin(y)$ or $\hat{\Gamma}(0, y) = e^{-y^2} \cos(y)$;



Perturbative equations

- Perturbative linearized system:

$$\frac{\partial^2 \hat{v}}{\partial y^2} - (k^2 - \alpha_i^2 + 2i\alpha_r\alpha_i)\hat{v} = \hat{\Gamma}$$

$$\frac{\partial \hat{\Gamma}}{\partial t} = (i\alpha_r - \alpha_i)\left(\frac{d^2 U}{dy^2}\hat{v} - U\hat{\Gamma}\right) + \frac{1}{Re}\left[\frac{\partial^2 \hat{\Gamma}}{\partial y^2} - (k^2 - \alpha_i^2 + 2i\alpha_r\alpha_i)\hat{\Gamma}\right]$$

$$\frac{\partial \hat{\omega}_y}{\partial t} = -(i\alpha_r - \alpha_i)U\hat{\omega}_y - i\gamma\frac{dU}{dy}\hat{v} + \frac{1}{Re}\left[\frac{\partial^2 \hat{\omega}_y}{\partial y^2} - (k^2 - \alpha_i^2 + 2i\alpha_r\alpha_i)\hat{\omega}_y\right]$$

The transversal velocity and vorticity components are \hat{v} and $\hat{\omega}_y$ respectively, $\hat{\Gamma}$ is defined as $\tilde{\Gamma} = \partial_x \tilde{\omega}_z - \partial_z \tilde{\omega}_x$.

- Initial conditions:

- $\hat{\omega}_y(0, y) = 0$;
- $\hat{\Gamma}(0, y) = e^{-y^2} \sin(y)$ or $\hat{\Gamma}(0, y) = e^{-y^2} \cos(y)$;

- Boundary conditions: $(\hat{u}, \hat{v}, \hat{w}) \rightarrow 0$ as $y \rightarrow \infty$.



Measure of the Growth

- Kinetic energy density e :

$$\begin{aligned} e(t; \alpha, \gamma) &= \frac{1}{2} \frac{1}{2y_d} \int_{-y_d}^{+y_d} (|\hat{u}|^2 + |\hat{v}|^2 + |\hat{w}|^2) dy \\ &= \frac{1}{2} \frac{1}{2y_d} \frac{1}{|\alpha^2 + \gamma^2|} \int_{-y_d}^{+y_d} \left(\left| \frac{\partial \hat{v}}{\partial y} \right|^2 + |\alpha^2 + \gamma^2| |\hat{v}|^2 + |\hat{\omega}_y|^2 \right) dy \end{aligned}$$



Measure of the Growth

- Kinetic energy density e :

$$\begin{aligned} e(t; \alpha, \gamma) &= \frac{1}{2} \frac{1}{2y_d} \int_{-y_d}^{+y_d} (|\hat{u}|^2 + |\hat{v}|^2 + |\hat{w}|^2) dy \\ &= \frac{1}{2} \frac{1}{2y_d} \frac{1}{|\alpha^2 + \gamma^2|} \int_{-y_d}^{+y_d} (|\frac{\partial \hat{v}}{\partial y}|^2 + |\alpha^2 + \gamma^2| |\hat{v}|^2 + |\hat{\omega}_y|^2) dy \end{aligned}$$

- Amplification factor G :

$$G(t; \alpha, \gamma) = \frac{e(t; \alpha, \gamma)}{e(t=0; \alpha, \gamma)}$$



Measure of the Growth

- Temporal growth rate r (Lasseigne et al., *J. Fluid Mech.*, 1999):

$$r(t; \alpha, \gamma) = \frac{\log|e(t; \alpha, \gamma)|}{2t}, \quad t > 0$$



Measure of the Growth

- Temporal growth rate r (Lasseigne et al., *J. Fluid Mech.*, 1999):



$$r(t; \alpha, \gamma) = \frac{\log|e(t; \alpha, \gamma)|}{2t}, \quad t > 0$$

- Angular frequency (pulsation) ω (Whitham, 1974):

$$\omega(t; \alpha, \gamma) = \frac{d\varphi(t)}{dt}, \quad \varphi \text{ time phase}$$





Effect of α_j and k

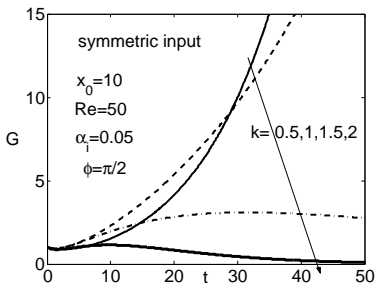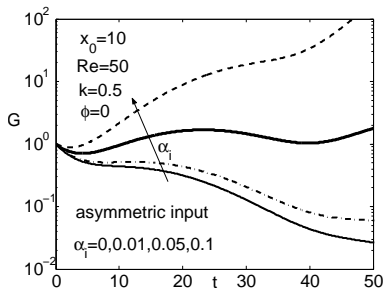




Scarsoglio, Tordella & Criminale, *Stud. Applied Math.*, 2009.






Effect of the symmetry of the perturbation



Effect of the symmetry of the perturbation





Effect of the symmetry of the perturbation



3D Visualization




Effect of ϕ

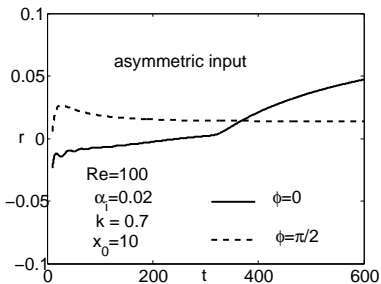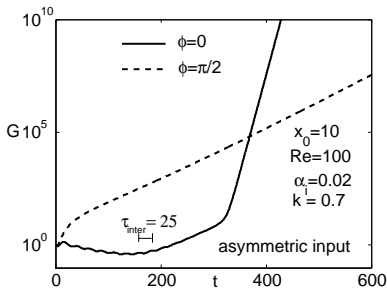

Comparison with modal analysis and laboratory data

Angular frequency and temporal growth rate, $\alpha_j = 0.05$, $\phi = 0$, $x_0 = 10$.

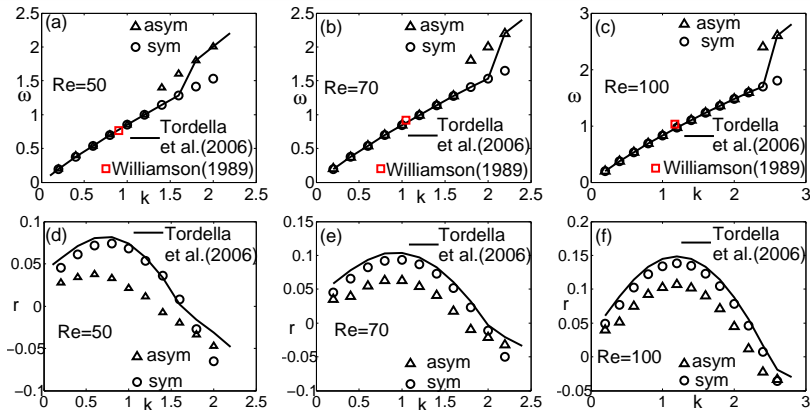

Scarsoglio, Tordella & Criminale, *ETC XII*, 2009.



Full linear problem

- Linearized 3D equations and Laplace-Fourier transform (x, z) ;



Full linear problem

- Linearized 3D equations and Laplace-Fourier transform (x, z) ;
- Base flow parametric in x and $Re \Rightarrow (U(y; x_0, Re), V(y; x_0, Re))$;



Full linear problem

- Linearized 3D equations and Laplace-Fourier transform (x, z);
- Base flow parametric in x and $Re \Rightarrow (U(y; x_0, Re), V(y; x_0, Re))$;

$$\begin{aligned}\frac{\partial^2 \hat{v}}{\partial y^2} &- (k^2 - \alpha_i^2 + 2ik \cos(\phi) \alpha_i) \hat{v} = \hat{\Gamma} \\ \frac{\partial \hat{\Gamma}}{\partial t} &= G \hat{\Gamma} + H \hat{v} + K \hat{\omega}_y \\ \frac{\partial \hat{\omega}_y}{\partial t} &= L \hat{\omega}_y + M \hat{v}\end{aligned}$$



Full linear problem

- Linearized 3D equations and Laplace-Fourier transform (x, z);
- Base flow parametric in x and $Re \Rightarrow (U(y; x_0, Re), V(y; x_0, Re))$;

$$\begin{aligned}\frac{\partial^2 \hat{v}}{\partial y^2} & - (k^2 - \alpha_i^2 + 2ik \cos(\phi) \alpha_i) \hat{v} = \hat{\Gamma} \\ \frac{\partial \hat{\Gamma}}{\partial t} & = G \hat{\Gamma} + H \hat{v} + K \hat{\omega}_y \\ \frac{\partial \hat{\omega}_y}{\partial t} & = L \hat{\omega}_y + M \hat{v}\end{aligned}$$

- $G = G(y; x_0, k, \phi, \alpha_i, Re)$, and similarly H, K, L and M , are ordinary differential operators.



Multiple scales hypothesis

- Regular perturbation scheme, $k \ll 1$:

$$\begin{aligned}\hat{V} &= \hat{V}_0 + k\hat{V}_1 + k^2\hat{V}_2 + \dots, \\ \hat{\Gamma} &= \hat{\Gamma}_0 + k\hat{\Gamma}_1 + k^2\hat{\Gamma}_2 + \dots, \\ \hat{\omega}_y &= \hat{\omega}_{y0} + k\hat{\omega}_{y1} + k^2\hat{\omega}_{y2} + \dots.\end{aligned}$$



Multiple scales hypothesis

- Regular perturbation scheme, $k \ll 1$:

$$\begin{aligned}\hat{V} &= \hat{V}_0 + k\hat{V}_1 + k^2\hat{V}_2 + \dots, \\ \hat{\Gamma} &= \hat{\Gamma}_0 + k\hat{\Gamma}_1 + k^2\hat{\Gamma}_2 + \dots, \\ \hat{\omega}_y &= \hat{\omega}_{y0} + k\hat{\omega}_{y1} + k^2\hat{\omega}_{y2} + \dots.\end{aligned}$$

- Temporal scales: $t, \tau = kt, T = k^2t$;



Multiple scales hypothesis

- Regular perturbation scheme, $k \ll 1$:

$$\begin{aligned}\hat{V} &= \hat{V}_0 + k\hat{V}_1 + k^2\hat{V}_2 + \dots, \\ \hat{\Gamma} &= \hat{\Gamma}_0 + k\hat{\Gamma}_1 + k^2\hat{\Gamma}_2 + \dots, \\ \hat{\omega}_y &= \hat{\omega}_{y0} + k\hat{\omega}_{y1} + k^2\hat{\omega}_{y2} + \dots.\end{aligned}$$

- Temporal scales: $t, \tau = kt, T = k^2t$;
- Spatial scales: $y, Y = ky$.



Multiple scales equations up to $O(k)$

- Order $O(1)$

$$\begin{aligned}\frac{\partial^2 \hat{v}_0}{\partial y^2} + \alpha_i^2 \hat{v}_0 &= \hat{\Gamma}_0 \\ \frac{\partial \hat{\Gamma}_0}{\partial t} - G_0 \hat{\Gamma}_0 - H_0 \hat{v}_0 &= 0 \\ \frac{\partial \hat{\omega}_{y0}}{\partial t} - L_0 \hat{\omega}_{y0} &= 0\end{aligned}$$



Multiple scales equations up to $O(k)$

- Order $O(1)$

$$\begin{aligned}\frac{\partial^2 \hat{v}_0}{\partial y^2} + \alpha_j^2 \hat{v}_0 &= \hat{\Gamma}_0 \\ \frac{\partial \hat{\Gamma}_0}{\partial t} - G_0 \hat{\Gamma}_0 - H_0 \hat{v}_0 &= 0 \\ \frac{\partial \hat{\omega}_{y0}}{\partial t} - L_0 \hat{\omega}_{y0} &= 0\end{aligned}$$

where $G_0 = G_0(y; x_0, \phi, \alpha_j, Re)$ and similarly for H_0 and L_0 .



Multiple scales equations up to $O(k)$

- Order $O(k)$

$$\frac{\partial^2 \hat{v}_1}{\partial y^2} + \alpha_i^2 \hat{v}_1 = -2 \frac{\partial^2 \hat{v}_0}{\partial y \partial Y} + 2i \cos(\phi) \alpha_i \hat{v}_0 + \hat{\Gamma}_1$$

$$\frac{\partial \hat{\Gamma}_1}{\partial t} - G_0 \hat{\Gamma}_1 - H_0 \hat{v}_1 = -\frac{\partial \hat{\Gamma}_0}{\partial \tau} + G_1 \hat{\Gamma}_0 + H_1 \hat{v}_0 + K_1 \hat{\omega}_{y0}$$

$$\frac{\partial \hat{\omega}_{y1}}{\partial t} - L_0 \hat{\omega}_{y1} = -\frac{\partial \hat{\omega}_{y0}}{\partial \tau} + L_1 \hat{\omega}_{y0} + M_1 \hat{v}_0$$



Multiple scales equations up to $O(k)$

- Order $O(k)$

$$\frac{\partial^2 \hat{v}_1}{\partial y^2} + \alpha_i^2 \hat{v}_1 = -2 \frac{\partial^2 \hat{v}_0}{\partial y \partial Y} + 2i \cos(\phi) \alpha_i \hat{v}_0 + \hat{\Gamma}_1$$



$$\frac{\partial \hat{\Gamma}_1}{\partial t} - G_0 \hat{\Gamma}_1 - H_0 \hat{v}_1 = -\frac{\partial \hat{\Gamma}_0}{\partial \tau} + G_1 \hat{\Gamma}_0 + H_1 \hat{v}_0 + K_1 \hat{\omega}_{y0}$$

$$\frac{\partial \hat{\omega}_{y1}}{\partial t} - L_0 \hat{\omega}_{y1} = -\frac{\partial \hat{\omega}_{y0}}{\partial \tau} + L_1 \hat{\omega}_{y0} + M_1 \hat{v}_0$$

where $G_1 = G_1(y, Y; x_0, \phi, \alpha_i, Re)$ and similarly for H_1, K_1, L_1 and M_1 .





Effect of α_j and k

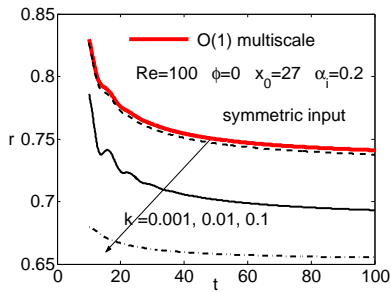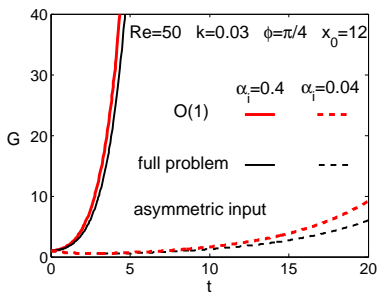

Scarsoglio, Tordella & Criminale, *Phys. Rev. E*, 2010.





Effect of the symmetry of the perturbation

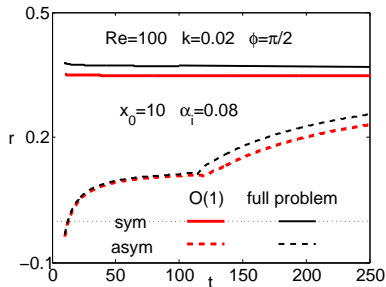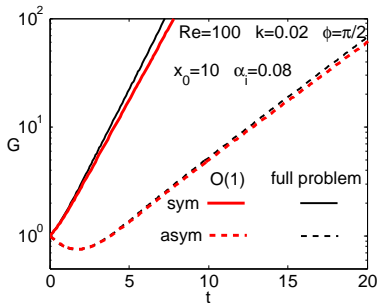

Asymptotic state

- Temporal asymptotic values of the angular frequency ω and the temporal growth rate r .

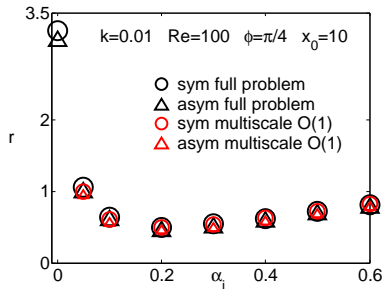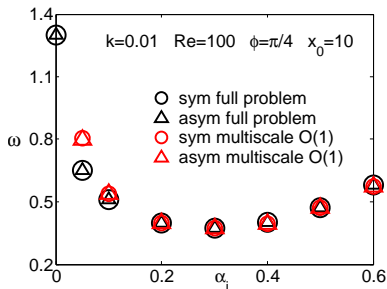

Conclusions

- Modal analysis
 - Synthetic perturbation hypothesis (saddle point sequence);



Conclusions

- Modal analysis
 - Synthetic perturbation hypothesis (saddle point sequence);
 - Absolute instability pockets in the intermediate wake ($Re = 50, 100$);



Conclusions

• Modal analysis

- Synthetic perturbation hypothesis (saddle point sequence);
- Absolute instability pockets in the intermediate wake ($Re = 50, 100$);
- Frequency in good agreement with numerical and experimental data;



Conclusions

• Modal analysis

- Synthetic perturbation hypothesis (saddle point sequence);
- Absolute instability pockets in the intermediate wake ($Re = 50, 100$);
- Frequency in good agreement with numerical and experimental data;
- *No information on the early time history of the perturbation;*



Conclusions

● Modal analysis

- Synthetic perturbation hypothesis (saddle point sequence);
- Absolute instability pockets in the intermediate wake ($Re = 50, 100$);
- Frequency in good agreement with numerical and experimental data;
- *No information on the early time history of the perturbation;*

● Initial-value problem

- How the transient is affected by the perturbation: different growths of energy, length of the transient, variety of temporal scales;

Conclusions

● Modal analysis

- Synthetic perturbation hypothesis (saddle point sequence);
- Absolute instability pockets in the intermediate wake ($Re = 50, 100$);
- Frequency in good agreement with numerical and experimental data;
- *No information on the early time history of the perturbation;*

● Initial-value problem

- How the transient is affected by the perturbation: different growths of energy, length of the transient, variety of temporal scales;
- Asymptotic good agreement with modal analysis and with experimental data (in terms of frequency and wavelength);



Conclusions

● Modal analysis

- Synthetic perturbation hypothesis (saddle point sequence);
- Absolute instability pockets in the intermediate wake ($Re = 50, 100$);
- Frequency in good agreement with numerical and experimental data;
- *No information on the early time history of the perturbation;*

● Initial-value problem

- How the transient is affected by the perturbation: different growths of energy, length of the transient, variety of temporal scales;
- Asymptotic good agreement with modal analysis and with experimental data (in terms of frequency and wavelength);
- Multiscaling $O(1)$ well approximates the full linear problem;



Conclusions

● Modal analysis

- Synthetic perturbation hypothesis (saddle point sequence);
- Absolute instability pockets in the intermediate wake ($Re = 50, 100$);
- Frequency in good agreement with numerical and experimental data;
- *No information on the early time history of the perturbation;*

● Initial-value problem

- How the transient is affected by the perturbation: different growths of energy, length of the transient, variety of temporal scales;
- Asymptotic good agreement with modal analysis and with experimental data (in terms of frequency and wavelength);
- Multiscaling $O(1)$ well approximates the full linear problem;
- *Rich description of the transient but more difficult handling of the parameters.*



Next Steps

- Energy spectrum of a general pre-unstable large set of *multiple transient three-dimensional waves* (accepted for *EFMC8*, 2010).



Next Steps

- Energy spectrum of a general pre-unstable large set of *multiple transient three-dimensional waves* (accepted for *EFMC8*, 2010).
⇒ Comparison with the Kolmogorov's 5/3 law;




Next Steps

- Energy spectrum of a general pre-unstable large set of *multiple transient three-dimensional waves* (accepted for *EFMC8*, 2010).
⇒ Comparison with the Kolmogorov's 5/3 law;
- Initial-value problem for the cross flow boundary layer ($U(y)$, $W(y)$);




Next Steps

- Energy spectrum of a general pre-unstable large set of *multiple transient three-dimensional waves* (accepted for *EFMC8*, 2010).
⇒ Comparison with the Kolmogorov's 5/3 law;
- Initial-value problem for the cross flow boundary layer $(U(y), W(y))$;

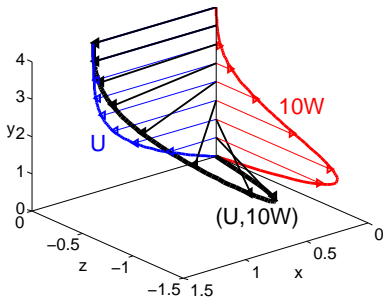

Next Steps

- Energy spectrum of a general pre-unstable large set of *multiple transient three-dimensional waves* (accepted for *EFMC8*, 2010).
⇒ Comparison with the Kolmogorov's 5/3 law;
- Initial-value problem for the cross flow boundary layer $(U(y), W(y))$;

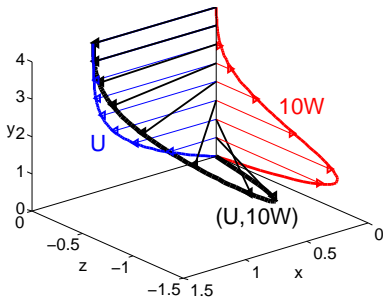

⇒ Analytical solution of multiscaling $O(1)$.

